


NOTE:
TESTING IS TO BE PERFORMED EVERY 200 L.F. PER 12" LIFT PLACED UNDER PAVING.

PAVED AREAS
TRENCH BACKFILL

BACKFILL COMPACTED IN 12" MAXIMUM LAYERS TO 100% OF MAXIMUM STANDARD PROCTOR DENSITY (ASTM D-698)

NOTES:
COMPACTED 5% STONE REQUIRED WHERE OVER EXCAVATED, UNSUITABLE MATERIAL OR WHERE WET CONDITIONS EXIST OTHERWISE PIPE SHALL BE LAID AT GRADE ON EXISTING SUITABLE GRANULAR MATERIAL

TRENCH DETAILS
NOT TO SCALE

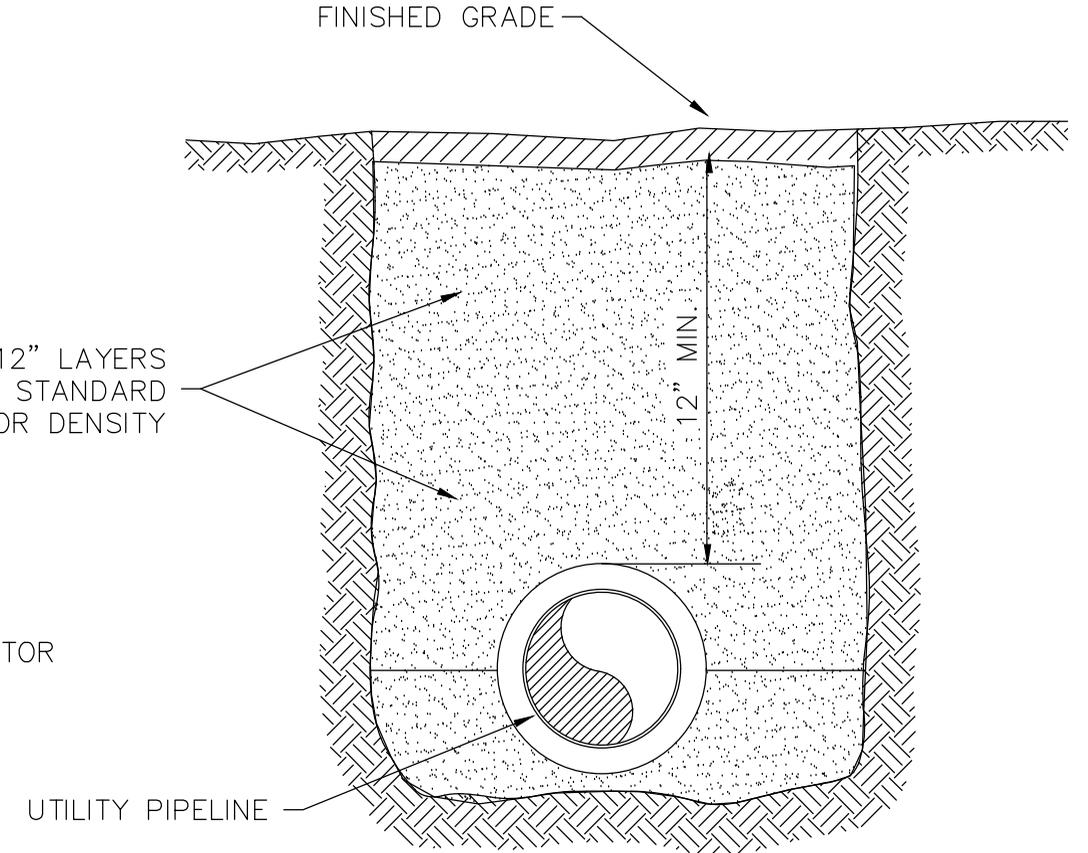

UNPAVED AREAS
PIPELINE INSTALLATION