

NON-PENETRATING
PICKHOLE (TYPICAL)

MACHINE AS REQUIRED
FOR $\pm \frac{1}{16}$ INCH
HEIGHT DIFFERENCE

MACHINED SURFACE


NON-PENETRATING
PICKHOLES (2 EACH)

NOTES:


1. ALL MANHOLE FRAMES & COVERS SHALL BE U.S. FOUNDRY & MFG. CORP. USF 1258 RING, OR APPROVED EQUAL. USF TYPE LU COVER OR APPROVED EQUAL. ALL COVERS SHALL HAVE TWO (2) NON-PENETRATING PICKHOLES. MFG/SUPPLIER SHALL PROVIDE CERTIFICATION THAT THE PRODUCT SUPPLIED MEETS THE MIN. WEIGHT AND DIMENSIONAL REQUIREMENTS.
2. DIMENSIONS SHALL BE MFG'S STANDARD AND PER NOTED DIMENSIONS. COVER MINIMUM WEIGHT SHALL BE 110 POUNDS.



PLAN - FRAME & COVER

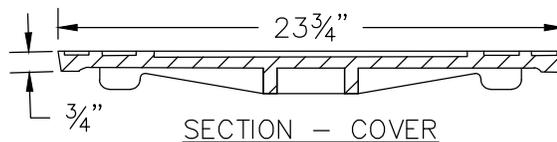

SECTION - COVER

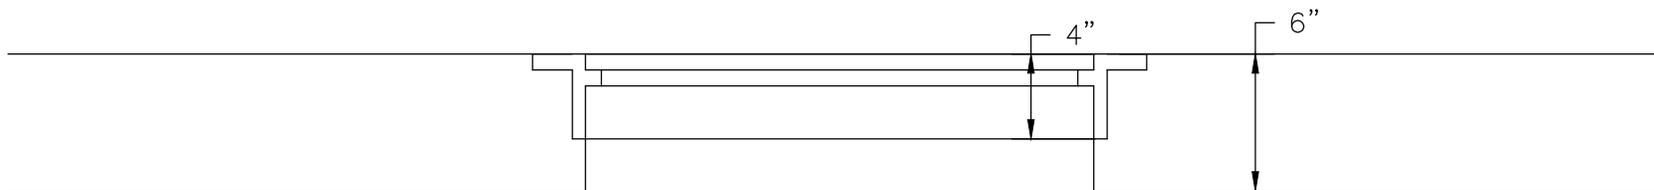

SECTION - FRAME

STORM MANHOLE FRAME & COVER

NOT TO SCALE

DETAIL NO: 03-106

REV. DATE: 10.3.19